


# 5 Zone Mixer Amplifier +DVD/USB/SD/FM/Bluetooth SP-MD60,SP-MD120,SP-MD250,SP-MD350

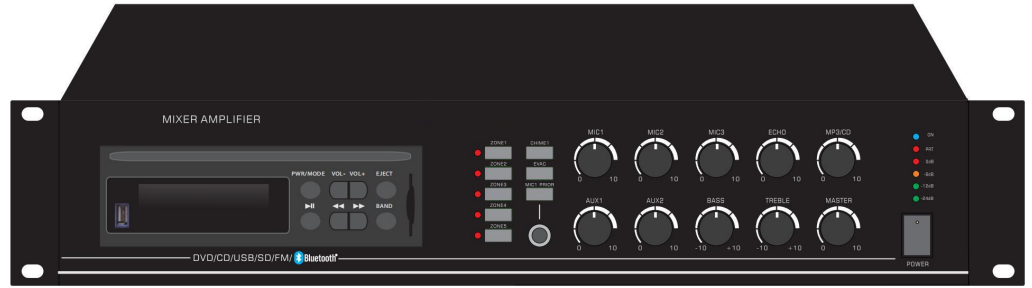

### Feature:

- 5 zone mixer amplifier with source inputs for paging & background music system.
- Designed for restaurant, classroom, retail store, small shops or rooms.
- 19" 2U desktop design and with removable rack mount ears.
- Rated power output 60W/ 120W/ 250W/ 350W/ 450W/ 550W.
- 70V-100V and low impedance 4-16ohms speaker outputs.
- With DVD/CD, USB/SD, Mp3, FM, Bluetooth, Echo.
- 5 Signal input: Mic 1-3, VOX, AUX 1-2, Mic 1 synchronal both on front and rear panels.
- 2 Signal output: Pre out, Video out; 5 zones speaker output
- Mic 1 with priority function, EVAC, CHIME.
- 9 Volume control knobs: Master/Bass/Treble, Mic 1-3, AUX 1-2, Echo, Mp3/DVD/CD
- 6 LED indicators for power, protect and signal.
- With natural cooling fan to control internal temperature.
- Short circuit, overload and high temperature protection
- SMT technical skills to enhance the stability.
- Warranty of 3 years with CE/RoHS certificate.

### Specification:

Model	SP-MD60	SP-MD120	SP-MD250	SP-MD350
Description	5 Zone Mixer Amplifier +DVD/USB/SD/FM/Bluetooth			
Rated Power	60W	120W	250W	350W
Speaker Output	5 zones, 100V or 70V, 4-16 Ohms			
Input	AUX1-2 500mV/10Kohm/MIC1-3 1-6mV/ MIC1 at 48V			
Output	Pre out, Video out			
Frequency Response	80Hz~20KHz			
Distortion(THD)	<0.5% at 1KHz 100V -3dB			
S/N Ratio	75dB			
Tone Control	Bass: 100Hz ±10dB, Treble: 10KHz ±10dB			
Power Supply	AC 110V-240V/50-60Hz			
Dimension	485(W)×340(D)×88(H)mm			
Weight	7KG	11KG	13.5KG	14.5KG

### Rear Panel:

