


SP-MA88/SP-MA88D4 Matrix processor

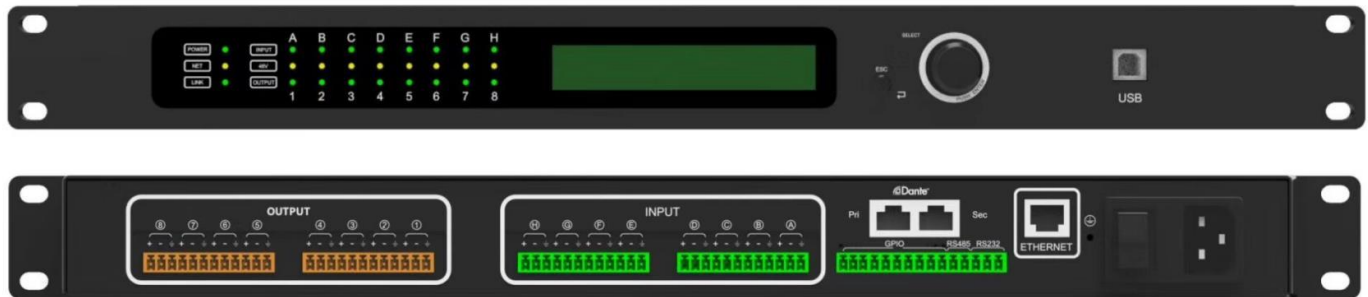

Features:

- 4-channel dante network audio optional
- 8-channel analog audio input 8-channel analog audio output, support free switching between microphone input and line input
- Each microphone input has 9-level sensitivity adjustment
- Each input with 48V phantom power switch
- Each input has a feedback suppression function switch, two-speed adjustment
- With AUTOMIX automatic mixing and matrix mixing function
- Input 31-segment PEQ adjustable, output 10-segment PEQ adjustable
- With video tracking control function, support most domestic and foreign camera control protocols
- USB driver-free automatic connection software, and supports RS232 central control
- Support mobile APP TCON software network control
- Support touch screen remote control by RS485 port

Specifications:

Model No.	SP-MA88/SP-MA88D4
Input Impedance	11.5KΩ
Maximum input level	12dBu/Line, -7dBu/Mic
Output impedance	150Ω
Power supply range	AC100V---240V 50/60 Hz
TCP/IP network port	RJ-45
Dimensions	44mmx483mmx210mm
Net weight	2.8kg
Working temperature	-20°C--80°C